



SHOWFOU PUMP

SUBMERSIBLE DRAINAGE PUMP

修附電機



ISO 9001
BSMI

標檢局

ISO-9001/CNS12681

SC/SF

一般污水用

SCA/SFA

自動浮球污水用

SC/SF
Drainage pump

SCA/SFA
Automatic drainage pump




SC 1/3HP-1HP



SCA 1/3HP-1HP



SF 1/3HP-3HP

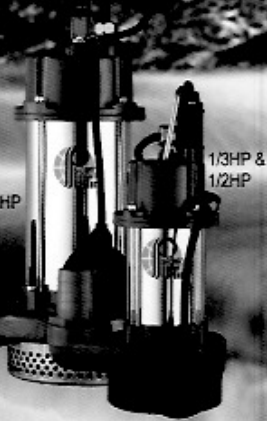

SFA 1/3HP-1HP

修附電機股份有限公司 SHOWFOU ELECTRIC MACHINE CO., LTD.

CAT. NO.: C0208-6

PT. ADHINUSA LESTARI JAYA

PHONE : 021-6901577 – FAX : 021-6901588

EMAIL : effendi@adhinusa.co.id

SC -- SUBMERSIBLE DRAINAGE PUMP

SCA -- AUTOMATIC SUBMERSIBLE DRAINAGE PUMP


■ FEATURES:

- A. Motor: Dry motor with level of protection IP 68, suitable for continuous duty.
 B. Thermal Protector: Single phase model built-in thermal protector prevents any burning damage to the motor.
 C. Pump Casing: Tough cast iron casing guarantees high pumping efficiency.
 D. Impeller: Excellent durability, semi-open type impeller design, prevents clogging by mud, sand, etc.
 E. Suction Cover: Easily replaceable.
 F. Triplex Seals: Equipped with double mechanical seal with one oil seal.

■ APPLICATION:



1. Civil engineering & construction.
 2. Fountains and water features
 3. Tunnel & caisson drainage.
 4. Agricultural irrigation.
 5. Drainage of seepage water, pumping of rain waste water, draining of environments, bathing and swimming pools, industrial applications

■ CONSTRUCTIONS:



NO.	PARTS LIST	MATERIAL
1	Cable	V. C. I.
2	Handle	Stainless Steel
3	Motor Head Cover	Cast Iron
4	Condenser	1e only
6	Upper Bracket	1e only
7	Upper Ball Bearing	Cast Iron
9	Coil	
10	Shaft	Stainless Steel
11	Rotor	Steel Plate
12	Stator	Steel Plate
13	Motor Casing	Cast Iron
14	Hose Coupling	Plastic
15	Mechanical Seal	Ceramic-Carbon
19	Oil Seal	Synthetic Rubber
20	Pump Casing	Cast Iron
21	Impeller	Cast Iron
22	Suction Cover	Cast Iron
23	Strainer	Steel
24	Float Switch	Only for SCA

■ DIMENSIONS



■ SPECIFICATIONS 50Hz/60Hz

型式	電動機 MOTOR		抽水機 PUMP		電線 電纜		重量 Weight	Spherical Solid	尺寸 SIZE							
TYPE	Power KW	Phase PH	Volt V	Disch. Dia. mm/inch	Max. Head M	Max. Flow M ³ /MIN	Cable mm ² x M	KG	mm	A mm	B mm	C mm	D mm	E mm	F mm	G mm
DRAINAGE PUMP																
SC-0311	0.25	1	110	40	1 1/2"	8	0.20	1.25"x6	15	7	225	110	170	163	80	350
SC-0312			220													
SC-0511			110													
SC-0512	0.4	1/2	110	50	2"	11	0.24	1.25"x6	18	7	255	120	190	165	85	410
SC-0512			220													
SC-111A			220													
SC-112A	0.75	1	110	50	2"	18	0.34	2"x6	26	7	255	120	190	165	85	430
SC-112A			220													
SC-132A			220													
SC-111B	0.75	1	110	80	3"	18	0.38	2"x6	28	7	310	125	210	205	95	430
SC-112			220													
SC-132			220													
AUTOMATIC DRAINAGE PUMP																
SCA-0311	0.25	1	110	40	1 1/2"	8	0.20	1.25"x6	15	7	225	110	170	85	80	350
SCA-0312			220													
SCA-0511			110													
SCA-0512	0.4	1/2	110	50	2"	11	0.24	1.25"x6	18	7	255	120	190	90	85	410
SCA-0512			220													
SCA-112A			220													
SCA-112B	0.75	1	110	80	3"	18	0.34	2"x6	26	7	255	120	190	90	85	430
SCA-112B			220													
SCA-132B			220													

■ PERFORMANCE CURVE 50Hz (RPM: 3000) / 60 Hz (RPM: 3600)

