




Electronic Constant Pressure Pump **SUPER**

...with micro-processor
equipped pump controller

Patent No. M414499
Patent No. M416688

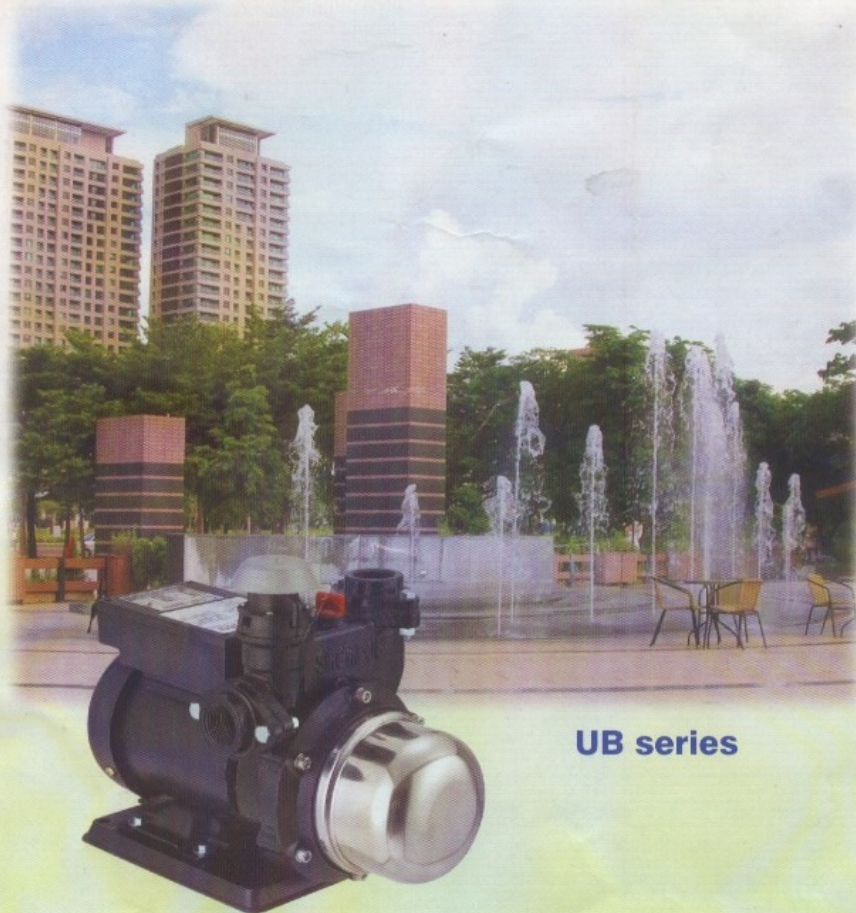

provides constant flow control for automatic water pressure system.

Two benefits:

- Anti-cycling feature
- Intelligent "loss of prime" protection

CAT. NO.: B0711-1



SHOWFOU **S** Electronic Constant Pressure Pump **SUPER**

UB series

■ DESCRIPTION :

Robust and compact multi-stage automatic centrifugal pump with Showfou' own unique micro-processor equipped pump controller for automatic water pressure.

Designed for domestic clean water supply at single and multistory homes.

■ APPLICATIONS :

Very good for pumps with clean non-volatile liquids without solids or fibers in below applications as :

- Ideal for domestic water supply
- Pressure boosting
- Automatic water transfer
- Washing system
- Small and medium size home , cottage
- Irrigation

■ OPERATING LIMITS :

Cut-out flow rate : 2 LPM
Maximum ambient temperature : 40 °C
Maximum water temperature : 40 °C

■ FEATURE :

Showfou UB series SUPER electronic constant pressure pump consists of a multi-stage centrifugal pump fitted with our own unique micro-processor equipped pump controller which keeps the pump running as long as there is a demand for water, eliminating fluctuating water pressure and annoying "cycling" situation in the presence of dripping taps etc.

Our own unique micro-processor equipped pump controller replaces the conventional pressure switch and provides strong and even pressure to eliminate cycling situation. And, it also provides advanced "loss of prime" protection which will stop the pump in "loss of prime" circumstances. Therefore, it can protect the pump from dry run damage.

The compact size UB series SUPER electronic constant pressure pump does not require large space for installation. And, we are using new super quiet motor with built-in thermal protector to provide non-intrusive and safe operation for consumer enjoyment.



All parts of the entire pump that are in contact with the water are manufactured from safe, corrosion resistant materials.



SHOWFOU

UB Series
Electronic Constant Pressure Pump

■ PERFORMANCE CURVES :

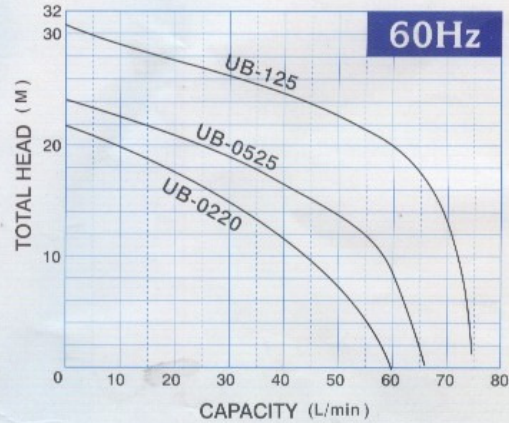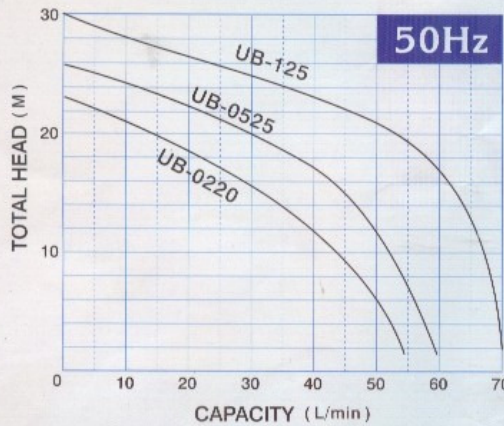


■ SPECIFICATIONS :

TYPE	Power		Volt	Disch. Dia.		Max. Head		Max. Flow		Default starting pressure setting (ON)	Starting pressure setting range * (ON)	Weight
	HP	kW		inch	mm	50Hz	60Hz	50Hz	60Hz			
UB-0220	1/4	0.2	100~240	3/4	20	23	22	50	60	1.2	1.2~1.6	10
UB-0525	1/2	0.4	100~240	1	25	26	24	60	66	1.6	1.6~2.0	11
UB-125	1	0.75	100~240	1	25	30	31	70	75	2.0	2.0~2.4	16

* While installation of the pump, be sure the inlet pressure of the pipe is lower than your starting pressure setting on the pump.

■ DIMENSIONS :

Unit:mm

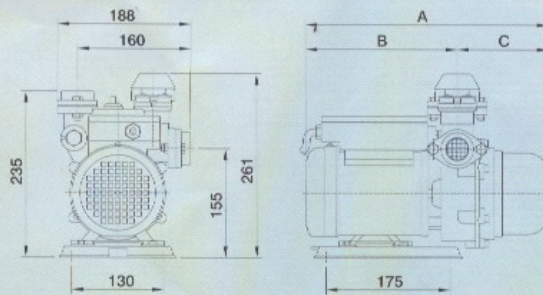

TYPE	Hz	DIMENSIONS (mm)			CARTON SIZE
		A	B	C	
UB-0220	60	333	204	129	366 x 215 x 270
	50	356	204	152	
UB-0525	60	343	214	129	366 x 215 x 270
	50	366	214	152	
UB-125	60	431	265	166	467 x 215 x 270
	50	457	265	192	

PT. ADHINUSA LESTARI JAYA
TELP : 021-6901577 - FAX : 021-6901588
EMAIL : efendy@adhinusa.co.id
HP Flexy : (021-32580777)